


## 8140-60xx

### Spray-ball 360° – 316L

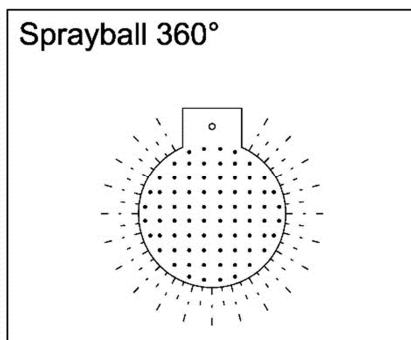

Dimensions				Applied Pressure	Flow rates		Cleaning Diameter	Stock No
Coverage	Supply tube OD	Ball diameter	Spray hole diameter	Bar	Imp Gal/hr	m3/hr	Max. tank Dia recommended (m)	
360	3/4"	40mm	1.6mm	1.0	813	3.70	3.8	8140-6019
360	3/4"	50mm	1.6mm	1.0	1220	5.55	2.5	8150-6019
360	1"	50mm	1.6mm	1.0	1583	7.20	4.3	8143-6026-051
360	1"	65mm	2.5mm	1.5	4241	19.30	2.8	8143-6026
360 Hosetail	1"	65mm	2.5mm	1.5	4241	19.30	2.8	8143-6026-073
360	1.5"	50mm	1.6mm	1.5	1758	8.00	2.9	8143-6038
360	1.5"	65mm	2.5mm	1.5	4923	22.4	4.6	8143-6038-2.3mm
360	1.5"	90mm	2.5mm	2.0	6945	31.6	3.5	8146-6038

Other options available

TECHNICAL DATA	
Material	316 Stainless Steel
Material Certification	BS EN 10204/FIN 50049 3.1 for all wetted parts
Finish	Internal 0.8Ra as standard (0.4Ra option available)
Pressure/Temperature	1-2 Bar Typ. / 0-134 °C
Tolerance	+/- 1mm
Notes	Dimensions are provided in good faith. Seals must be chosen for required operating medium and temperature
GENERAL CAPABILITIES	
Design and System Fabrication, Hygienic Process Plant, Project Management, In-house Manual and Orbital Welding, Machining, Fabrication and Polishing, Component Customisation	
Full materials certification, weld maps, logs, welder qualifications and weld procedures, pickling, passivation and ferroxyl certification.	

D814X-03-V05 ECN 1034

## CUSTOMISED STAINLESS STEEL SYSTEMS, FABRICATIONS AND COMPONENTS

### Axium Process Ltd

Hendy Industrial Estate, Hendy, Swansea, UK SA4 0XP

Tel: +44 (0) 1792 883882

Fax: +44 (0) 1792 886049

Email: [info@axiumprocess.com](mailto:info@axiumprocess.com)

Web: [www.axiumprocess.com](http://www.axiumprocess.com)



FS 83081

All data is provided in good faith and is subject to change