


## 814X-01

### Sprayball 180° upward – 316L

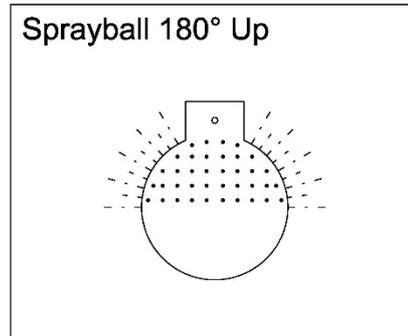

Dimensions				Applied Pressure	Flowrates		Cleaning Diameter	Stock No
Coverage	Supply tube OD	Ball diameter	Spray hole diameter	Bar	Imp Gal/hr	m3/hr	Max. tank dia recommended (m)	
180U	1"	65mm	2.5mm	2.0	3164	14.4	6.2	8145-6026
180U	1.5"	65mm	1.6mm	2.0	1230	5.6	5.7	8145-6036
180U	1.5"	65mm	2.4mm	2.0	2527	11.5	1.30	8145-6038-2.4mm

Other options available

TECHNICAL DATA	
Material	316 Stainless Steel
Material Certification	BS EN 10204/FIN 50049 3.1 for all wetted parts
Finish	Internal 0.8Ra as standard (0.4Ra option available)
Pressure/Temperature	1-2 Bar Typ. / 0-134°C
Tolerance	+/- 1mm
Notes	Dimensions are provided in good faith. Seals must be chosen for required operating medium and temperature
GENERAL CAPABILITIES	
Design and System Fabrication, Hygienic Process Plant, Project Management, In-house Manual and Orbital Welding, Machining, Fabrication and Polishing, Component Customisation	
Full materials certification, weld maps, logs, welder qualifications and weld procedures, pickling, passivation and ferroxyl certification.	

D814X-01-V06 ECN2347

## CUSTOMISED STAINLESS STEEL SYSTEMS, FABRICATIONS AND COMPONENTS

### Axium Process Ltd

Hendy Industrial Estate, Hendy, Swansea, UK SA4 0XP

Tel: +44 (0) 1792 883882

Fax: +44 (0) 1792 886049

Email: [info@axiumprocess.com](mailto:info@axiumprocess.com)

Web: [www.axiumprocess.com](http://www.axiumprocess.com)



All data is provided in good faith and is subject to change