


## 5034

### Clamp ferrule imperial tube 316L 28mm BS4825\*

Nom size inch	A	B	C	L	Stock No
1/2"	25.4	9.52	12.7	28.0	5034-6013
3/4"	25.4	15.87	19.05	28.0	5034-6013
*1"	50.5	22.20	25.65	28.0	5034-6026
*1 1/2"	50.5	34.90	38.35	28.0	5034-6026
*2"	64.0	47.60	51.05	28.0	5034-6051
*2 1/2"	77.5	60.30	63.75	28.0	5034-6064
*3"	91.0	73.00	76.45	28.0	5034-6076
*4"	119.0	97.60	101.85	28.0	5034-6102
4 1/2"	130.0	110.3	114.95	28.0	5034-6114
5"	144.4	123.0	127.0	28.0	5034-6127
5 1/2"	155.0	135.76	140.55	28.0	5034-6140
6"	167.0	150.0	154.0	28.0	5034-6154
6 5/8"	183.0	163.1	169.35	28.0	5034-6168
8"	217.4	200.0	204.0	28.0	5034-6204
8 5/8"	233.5	213.9	220.55	28.0	5034-6219
10"	268.0	250.0	254.0	28.0	5034-6254
10 5/8"	286.1	266.3	273.0	28.0	5034-6270
12"	319.0	300.8	304.8	28.0	5034-6305

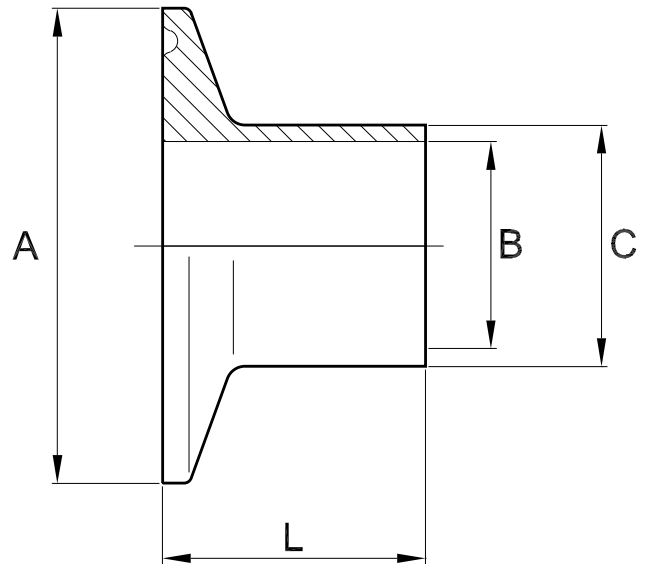

TECHNICAL DATA	
Associated Standards	*BS 4825-3 (1"-4" inclusive)
Material	316L Stainless Steel
Material Certification	BS EN 10204/DIN 50049 3.1 for all wetted parts
Finish	0.8Ra or better as standard (0.4Ra available)
Tolerance	+/- 1.0mm
Options	Non-standard BS 4825 ferrules in varying lengths are also available, Hastelloy C-22, Duplex, tank ferrules
Clamp Fittings Range includes:	Unions, ferrules, blanks, tees, bends, hoseliners, adaptors, concentric & eccentric reducers, Y pieces
Seals	FDA & USP Class VI approved polymers including EPDM, Nitrile, Silicone, Platinum Cured Silicone, Encapsulated & Solid PTFE, Viton® (Viton is a registered trade mark of Dupont Dow Elastomers).
Notes	Dimensions are provided in good faith. Seals must be chosen for required operating medium and temperature
GENERAL CAPABILITIES	
Design and System Fabrication, Hygienic Process Plant, Project Management, In-house Manual and Orbital Welding, Machining, Fabrication and Polishing, Component Customisation	
Full materials certification, weld maps, logs, welder qualifications and weld procedures, pickling, passivation and ferroxyl certification.	

D5034-V04 ECN 725

## CUSTOMISED STAINLESS STEEL SYSTEMS, FABRICATIONS AND COMPONENTS

### Axium Process Ltd

Hendy Industrial Estate, Hendy, Swansea, UK SA4 0XP

Tel: +44 (0) 1792 883882

Fax: +44 (0) 1792 886049

Email: [info@axiumprocess.com](mailto:info@axiumprocess.com)

Web: [www.axiumprocess.com](http://www.axiumprocess.com)



All data is provided in good faith and is subject to change