


## 5044-01 Clamp lipped solid PTFE Seal imperial tube (type A) BS4825\* - other material options available

Nom size	A	B	Stock No
1"*	50.5	22.2	5044-7026
1 1/2"*	50.5	34.9	5044-7038
2"*	64.0	47.6	5044-7051
2 1/2"*	77.5	60.3	5044-7064
3"*	91.0	73.0	5044-7076
3 1/2"	106.0	84.7	5044-7089
4"*	119.0	97.6	5044-7102
4 1/2"*	130.0	110.5	5044-7114
5"	144.4	123.2	5044-7127
5 1/2"	155.0	135.7	5044-7140
6	167.0	150.0	5044-7154
6 5/8"	183.0	163.1	5044-7168
8"	217.4	200.0	5044-7204
8 5/8"	233.5	213.9	5044-7219
10"	268.0	250.0	5044-7254
10 5/8"	286.1	256.3	5044-7270
12"	319.0	301.0	5044-7305

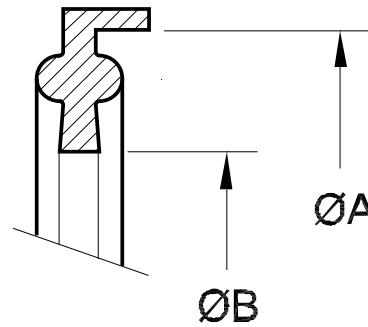

TECHNICAL DATA	
Associated Standards	*BS 4825 : Part 3 : 1991 (1"-4" inclusive), ASME BPE 2009, ISO 1127 (2852), DIN 32676, SMS 3008
Materials available	FDA & USP Class VI approved polymers including EPDM, Nitrile, Silicone, Platinum Cured Silicone, Encapsulated & Solid PTFE, Viton® (Viton is a registered trade mark of Dupont Dow Elastomers).
Pressure/Temperature	Will depend upon the seal material selected

### SEAL MATERIALS AND CHARACTERISTICS

Seal Characteristics/Resistance	Nitrile or Buna	EPDM	Silicone	*Viton®	PTFE and Encapsulated PTFE
Operating Temperatures	-20°C to +120°C	-50°C to +150°C	-90°C to +200°C	-30°C to +250°C	-25°C to +250°C
Acids	Good	Good	Fair	Good	Excellent
Alkalis	Fair/Good	Good	Fair	Poor/Fair	Excellent
Fats/Oils	Good/Excellent	Poor	Fair	Good	Excellent
Petroleum	Good	Poor	Good	Excellent	Excellent
Steam	Fair	Excellent	Good	Good	Fair
Taste	Good	Good	Good	Good	Excellent
Colour	Good	Fair/Good	Good	Good	Excellent

The temperature range quoted is for guidance only/\*Viton® is a registered trade mark of Dupont Dow Elastomers

D5044-01-V03 ECN725

## CUSTOMISED STAINLESS STEEL SYSTEMS, FABRICATIONS AND COMPONENTS

### Axium Process Ltd

Hendy Industrial Estate, Hendy, Swansea, UK SA4 0XP

Tel: +44 (0) 1792 883882

Fax: +44 (0) 1792 886049

Email: info@axiumprocess.com

Web: www.axiumprocess.com



All data is provided in good faith and is subject to change