


## Sightglass, Clamp blank - Duplex

Standard tube OD	A	B	C	D	E	Max Op @ 150°C Pressure (bar)	Stock No
DN(mm) DN(inch)							
10/15/20 1/2" / 3/4"	34	21	12	27.5	7	16	5137-D013
25/32/40 1" / 1 1/2"	50.5	41	25	43.5	7	16	5137-D026
50 2"	64	52	30	56.5	7	16	5137-D051
	77.5	69	35	70.5	10	10	5137-D064
65 3"	91	76	40	83.5	10	10	5137-D076
80 3 1/2"	106	90	50	97	10	10	5137-D089
100 4"	119	102	55	110	12	10	5137-D100
	167	152	75	156.5	16	6	5137-D154
150 8"	183	160	75	174.3	16	6	5137-D150
200 10"	217.5	198	100	207.4	16	6	5137-D204
	233.5	210	100	225.1	16	6	5137-D200
250 12"	268	245	120	257.8	18	6	5137-D254
	287.5	266	120	278.4	18	6	5137-D250
300	319.3	300	140	309.1	20	6	5137-D305
	338.3	316	140	328.4	20	6	5137-D300

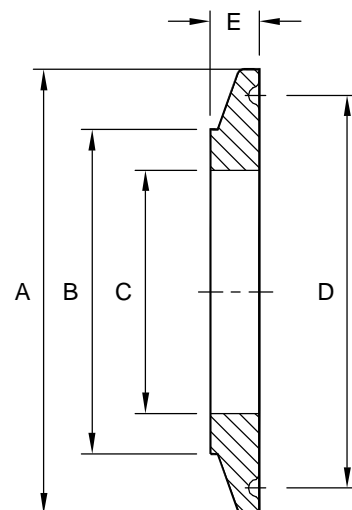

### Technical Data:

- Material: Duplex (1.4462), Borosilicate Glass (DIN7080)
- Finish: 0.8RA or better
- Pressure/Temperature: See above (temp according to seal material)
- Associated standards: DIN32676, ISO2852
- Tolerance: +/- 0.5mm
- Seals: None

- We stock a comprehensive range of plain-ended fittings including bends, tees, reducers, "Y" pieces, hosetails and equal cross pieces
- Components can be fabricated to customer specification
- Fabrication capabilities include frameworks, skid mounted systems, manifolds, jacketed assemblies, adaptors, flowplates and spool pieces.
- In-house services include machining, welding, fabrication, polishing.

D5137- V01

### NOTES

FORM No:FM002-V02

Axium Process Ltd  
Hendy Industrial Estate  
Hendy, Swansea  
SA4 0XP UK

- Dimensions are provided in good faith but maybe subject to change
- Seals must be chosen for required operating medium & temperature

(T) +44 (0)1792 883 882  
 (F) +44 (0)1792 886 049  
 (E) [info@axiumprocess.com](mailto:info@axiumprocess.com)  
 (W) [www.axiumprocess.com](http://www.axiumprocess.com)