


6095

BSPP to plain-ended adaptor - 316

Nom size	A	B	C	D	E	Stock No
1/2"	12.7	20.9	30	15	9.5	6095-5013
3/4"	19	26.4	30	15	15.8	6095-5019
1"	25.4	33.2	30	15	22.2	6095-5026
1 1/4"	31.7	41.9	40	20	28.5	6095-5031
1 1/2"	38.1	47.8	40	20	34.9	6095-5038
2"	50.8	59.6	40	20	47.6	6095-5051
2 1/2"	63.5	75.1	50	25	60.3	6095-5064
3"	76.2	87.8	50	25	73	6095-5076
4"	101.6	113	-	-	98.4	6095-5102
5"	129	138.4	-	-	125	6095-5125
6"	154	163.8	-	-	150	6095-5154

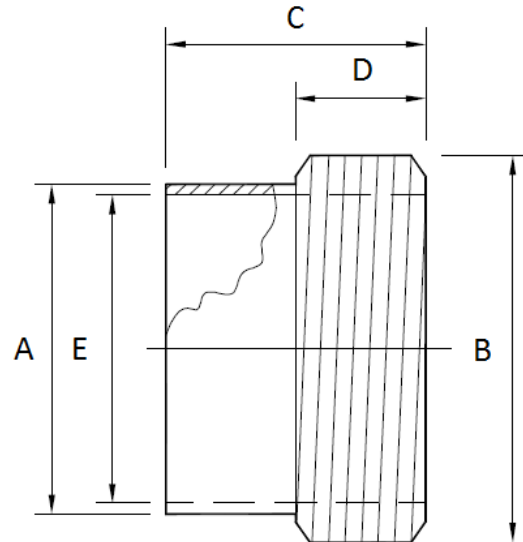

TECHNICAL DATA	
Associated Standards	BS 4825 Part 1(1" to 4" inclusive), BS EN 10226-1, ISO2037
Material	316 Stainless Steel
Finish	Polished to 1.0 Ra
Tolerance	+/- 1mm
Seals	PTFE Tape or End Seal
Application	Non-hygienic
Notes	Dimensions are provided in good faith. Seals must be chosen for required operating medium and temperature
GENERAL CAPABILITIES	
Design and System Fabrication, Hygienic Process Plant, Project Management, In-house Manual and Orbital Welding, Machining, Fabrication and Polishing, Component Customisation	
Full materials certification, weld maps, logs, welder qualifications and weld procedures, pickling, passivation and ferroxyl certification.	

D6095-V02 / ECN1597

CUSTOMISED STAINLESS STEEL SYSTEMS, FABRICATIONS AND COMPONENTS

Axium Process Ltd

Hendy Industrial Estate, Hendy, Swansea, UK SA4 0XP

Tel: +44 (0) 1792 883882

Fax: +44 (0) 1792 886049

Email: info@axiumprocess.com

Web: www.axiumprocess.com



All data is provided in good faith and is subject to change