


8456 - Fine Screen Filter – 100 Series – 90° Type

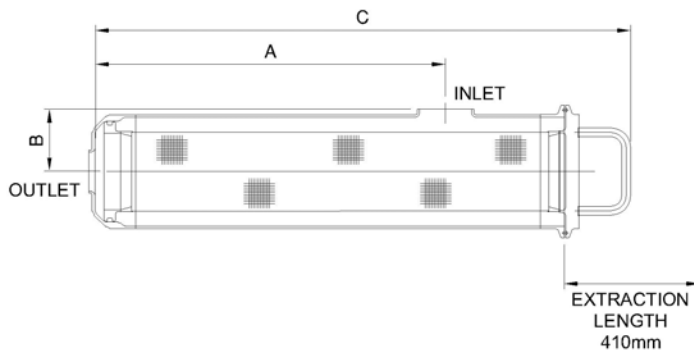

Nominal Size	Plain Ended			Clamp			RJT (M/M)			DIN (M/M)			IDF (M/M)			SMS (M/M)		
	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
1"	314	56	490	335	77	511	336	78	512	343	85	519	335	77	511	329	71	505
1 ½"	314	56	490	335	77	511	336	78	512	347	89	523	335	77	511	334	76	510
2"	314	56	490	335	77	511	336	78	512	349	91	525	335	77	511	334	76	510
2 ½"	314	56	490	342	84	518	336	78	512	354	96	530	335	77	511	338	80	514
3"	314	56	490	342	84	518	336	78	512	359	101	535	335	77	511	338	80	514
4"	314	56	490	342	84	518	336	78	512	368	110	544	344	77	541	344	86	520

TECHNICAL DATA	
Material	316L Stainless Steel contact parts
Finish	Satin (external) / 0.4µm Ra (internal) Bead-blasted and electro-polished options available
Flow Rates (Based On Pure Water):	Up to 20,000 l/hr at 1 Bar ΔP with pure water, depending on size, loading and pressure drop
Pressures:	Up to 10 bar operating pressure / 5 bar backflushing pressure (5–75µm) Up to 10 bar operating pressure / 2 bar backflushing pressure (100–200µm) Recommended maximum ΔP 4 bar
Operating Temperature:	Up to 250°C depending on cap seal material
Cap Seal & Base O Ring:	Viton® as standard (EPDM, silicone, encapsulated or solid PTFE options available)
Micron Ratings:	5, 10, 20, 40, 75, 150, 200µm (nominal)
End Connection:	Clamp / Plain ended ex-stock (RJT, IDF, DIN, SMS, BSP and Flanged options available)
Standard Connection Sizes:	1", 1 ½", 2", 2 ½", 3", 4" (other sizes available on request)
Clamp Closure:	316 Stainless Steel Safety Clamp fitted as standard to enhance plant safety.
Notes:	Dimension Tolerance: +/-5mm Flow rate will depend on size, loading and pressure drop.
GENERAL CAPABILITIES	
Design and System Fabrication, Hygienic Process Plant, Project Management, In-house Manual and Orbital Welding, Machining, Fabrication and Polishing, Component Customisation	
Full materials certification, weld maps, logs, welder qualifications and weld procedures, pickling, passivation and ferroxyl certification.	

D8456-V02/ECN1599

CUSTOMISED STAINLESS STEEL SYSTEMS, FABRICATIONS AND COMPONENTS

Axium Process Ltd

Hendy Industrial Estate, Hendy, Swansea, UK SA4 0XP
 Tel: +44 (0) 1792 883882
 Fax: +44 (0) 1792 886049
 Email: info@axiumprocess.com
 Web: www.axiumprocess.com



All data is provided in good faith and is subject to change