


8458 - Fine Screen Filter – 100 Series – In Line Type

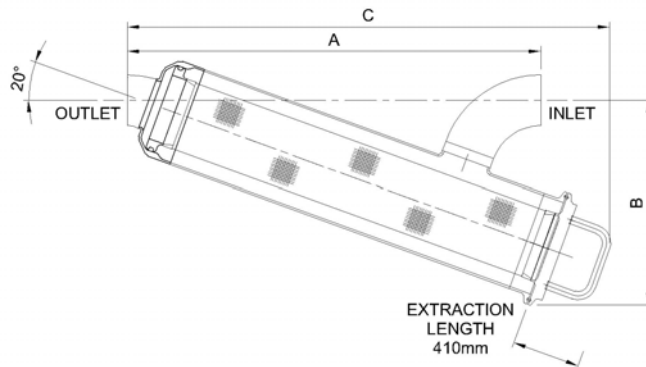

Nominal Size	Plain Ended			Clamp			RJT (M/M)			DIN (M/M)			IDF (M/M)			SMS (M/M)		
	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
1"	379	209	487	422	209	509	422	209	509	437	209	516	422	209	509	409	209	394
1 1/2"	396	210	490	439	210	512	439	210	512	462	210	523	439	210	512	436	210	416
2"	418	211	498	461	211	520	461	211	520	488	211	533	461	211	520	458	211	438
2 1/2"	442	213	508	485	213	530	485	213	530	522	213	548	485	213	530	490	213	466
3"	488	225	536	531	225	558	531	225	558	578	225	581	531	225	558	536	225	512
4"	607	250	620	650	250	642	650	250	642	715	250	674	667	250	650	667	250	637

TECHNICAL DATA	
Material	316L Stainless Steel contact parts
Finish	Satin (external) / 0.4µm Ra (internal) Bead-blasted and electro-polished options available
Flow Rates (Based On Pure Water):	Up to 20,000 l/hr at 1 Bar ΔP with pure water, depending on size, loading and pressure drop
Pressures:	Up to 10 bar operating pressure / 5 bar backflushing pressure (5–75µm) Up to 10 bar operating pressure / 2 bar backflushing pressure (100–200µm) Recommended maximum ΔP 4 bar
Operating Temperature:	Up to 250°C depending on cap seal material
Cap Seal & Base O Ring:	Viton® as standard (EPDM, silicone, encapsulated or solid PTFE options available)
Micron Ratings:	5, 10, 20, 40, 75, 150, 200µm (nominal)
End Connection:	Clamp / Plain ended ex-stock (RJT, IDF, DIN, SMS, BSP and Flanged options available)
Standard Connection Sizes:	1", 1 1/2", 2", 2 1/2", 3", 4" (other sizes available on request)
Clamp Closure:	316 Stainless Steel Safety Clamp fitted as standard to enhance plant safety.
Notes:	Dimension Tolerance: +/-5mm Flow rate will depend on size, loading and pressure drop.
GENERAL CAPABILITIES	
Design and System Fabrication, Hygienic Process Plant, Project Management, In-house Manual and Orbital Welding, Machining, Fabrication and Polishing, Component Customisation	
Full materials certification, weld maps, logs, welder qualifications and weld procedures, pickling, passivation and ferroxyl certification.	

D8458-V03/ECN1599

CUSTOMISED STAINLESS STEEL SYSTEMS, FABRICATIONS AND COMPONENTS

Axium Process Ltd

Hendy Industrial Estate, Hendy, Swansea, UK SA4 0XP

Tel: +44 (0) 1792 883882

Fax: +44 (0) 1792 886049

Email: info@axiumprocess.com

Web: www.axiumprocess.com



All data is provided in good faith and is subject to change