


8124

Plain-ended sanitary ball valve 3 part

Nom size	A	B	Stock No
1/2"	12.7	90.0	8124-5013
3/4"	19.1	90.0	8124-5019
1"	25.4	100.0	8124-5026
1 1/2"	38.2	125.0	8124-5038
2"	50.8	150.0	8124-5051
2 1/2"	63.5	190.0	8124-5064
3"	76.2	220.0	8124-5076
4"	101.6	270.0	8124-5102

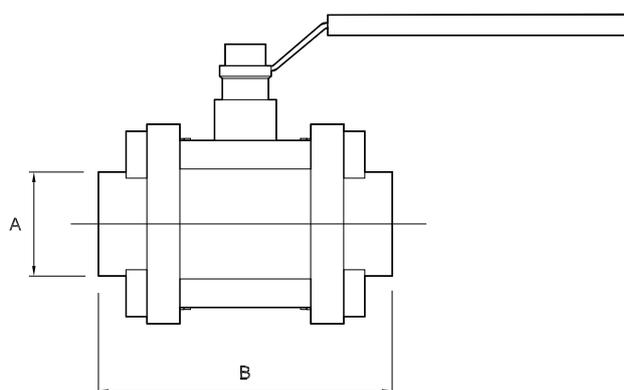

TECHNICAL DATA	
Associated Standards	ASME B16.34, BS4825, ISO2852
Material	316L Stainless Steel
Material Certification	BS EN 10204/DIN 50049 3.1 for all wetted parts
Finish	OD = Mechanical Polish, ID 0.8 µm Ra
Pressure/	Up to 400 PSI/G (25 Bar/g)
Applications:	Designed for on/off duties – suitable for in-situ steam sterilisation is critical
End Fitting Options	Clamp, RJT, DIN, IDF, and SMS
Seals	TFM 11600®
Notes	Dimensions are provided in good faith. Seals must be chosen for required operating medium and temperature
GENERAL CAPABILITIES	
Design and System Fabrication, Hygienic Process Plant, Project Management, In-house Manual and Orbital Welding, Machining, Fabrication and Polishing, Component Customisation	
Full materials certification, weld maps, logs, welder qualifications and weld procedures, pickling, passivation and ferroxyl certification.	

D8124-V03 / ECN 730

CUSTOMISED STAINLESS STEEL SYSTEMS, FABRICATIONS AND COMPONENTS

Axium Process Ltd

Hendy Industrial Estate, Hendy, Swansea, UK SA4 0XP

Tel: +44 (0) 1792 883882

Fax: +44 (0) 1792 886049

Email: info@axiumprocess.com

Web: www.axiumprocess.com



All data is provided in good faith and is subject to change