


8456 - Fine Screen Filter – 100 Series – 90°

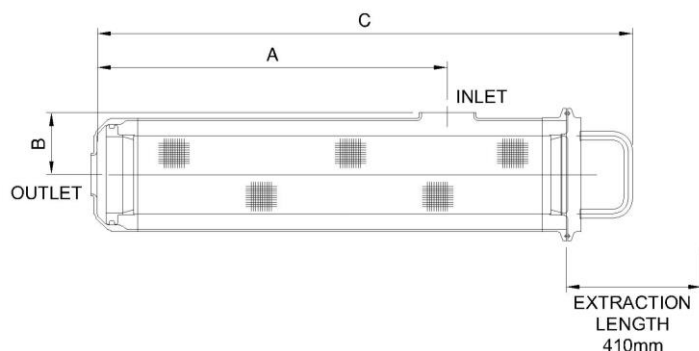

Nominal Size	Plain Ended			Clamp			RJT (M/M)			DIN (M/M)			IDF (M/M)			SMS (M/M)		
	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
1"	314	56	490	335	77	511	336	78	512	343	85	519	335	77	511	329	71	505
1 1/2"	314	56	490	335	77	511	336	78	512	347	89	523	335	77	511	334	76	510
2"	314	56	490	335	77	511	336	78	512	349	91	525	335	77	511	334	76	510
2 1/2"	314	56	490	342	84	518	336	78	512	354	96	530	335	77	511	338	80	514
3"	314	56	490	342	84	518	336	78	512	359	101	535	335	77	511	338	80	514
4"	314	56	490	342	84	518	336	78	512	368	110	544	344	77	541	344	86	520

Technical Data	
Material:	316L Stainless Steel contact parts
Finish:	0.8µm Ra (external) / 0.4µm Ra (internal), other surface finishes available
Flow Rates:	Up to 20,000 l/hr at 1 Bar ΔP with pure water, depending on size, loading and pressure drop
Pressures:	Up to 10 bar operating pressure / 5 bar backflushing pressure (5–75µm) Recommended maximum ΔP 4 bar
Operating Temperature:	Up to 250°C, dependent upon cap seal material
Cap Seal:	Viton® as standard (EPDM, silicone, nitrile, encapsulated or solid PTFE options available)
Standard Micron Ratings (µm):	5, 10, 25, 50 (nominal)
Process connections:	Clamp, Plain ended, RJT, IDF, DIN, SMS, BSP and flanged options available
Standard Connection Sizes:	1 1/2", 2", 2 1/2", 3" (other sizes available on request)
Clamp Closure:	316 Stainless Steel safety clamp fitted as standard to enhance plant safety.
Options:	Filters can be customised to meet customer requirements, including the addition of drain ports, jacketed options, multiplex systems
Notes:	Dimension Tolerance: ±10mm Flow rate will depend on size, loading and pressure drop
Available certification:	
Full materials certification, weld maps, logs, welder qualifications and weld procedures, pressure testing, surface finish, radiography, passivation and ferroxyl certification.	

D8456-V03/ECN3049

CUSTOMISED STAINLESS STEEL SYSTEMS, FABRICATIONS AND COMPONENTS

Axium Process Ltd

Hendy Industrial Estate, Hendy, Swansea, UK SA4 0XP

Tel: +44 (0) 1792 883882

Fax: +44 (0) 1792 886049

Email: info@axiumprocess.com

Web: www.axiumprocess.com



All data is provided in good faith and is subject to change