


## 8469

### Fine Screen Compact Filter – 100 Series – Straight Through

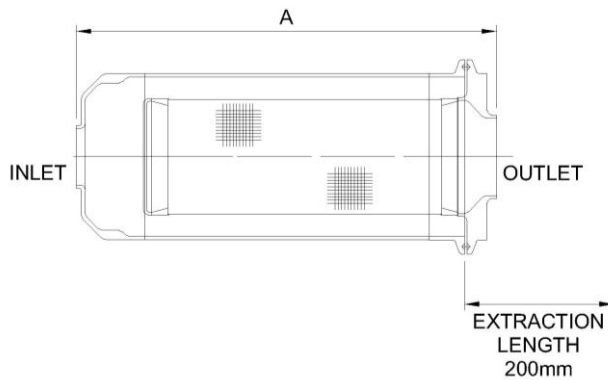

Nominal Size	Plain Ended	Clamp	RJT (M/M)	DIN (M/M)	IDF (M/M)	SMS (M/M)
Dimension	A	A	A	A	A	A
1"	258	300	302	316	300	288
1 1/2"	258	300	302	324	300	298
2"	258	300	302	328	300	298
2 1/2"	258	314	302	338	300	306
3"	258	314	302	348	300	306
4"	258	314	302	366	318	318

TECHNICAL DATA	
Material	316L Stainless Steel contact parts
Finish	0.8µm Ra (external) / 0.4µm Ra (internal), other surface finishes available
Flow Rates:	Up to 10,000 l/hr at 1 Bar ΔP with pure water, depending on size, loading and pressure drop
Pressures:	Up to 10 bar operating pressure / 5 bar backflushing pressure (5–75µm) Up to 10 bar operating pressure / 2 bar backflushing pressure (100–200µm) Recommended maximum ΔP 4 bar
Operating Temperature:	Up to 250°C depending on cap seal material
Cap Seal & Base O Ring:	Viton® as standard (EPDM, silicone, nitrile, encapsulated or solid PTFE options available)
Micron Ratings (µm):	5, 10, 25, 50 (nominal)
End Connection:	Clamp / Plain ended ex-stock (RJT, IDF, DIN, SMS, BSP and Flanged options available)
Standard Connection Sizes:	1 1/2", 2", 2 1/2", 3" (other sizes available on request)
Clamp Closure:	316 Stainless Steel Safety Clamp fitted as standard to enhance plant safety.
Options:	Filters can be customised to meet customer requirements, including the addition of drain ports, jacketed options, multiplex systems
Notes:	Dimension Tolerance: ±10mm Flow rate will depend on size, loading and pressure drop
Available certification:	
Full materials certification, weld maps, logs, welder qualifications and weld procedures, pressure testing, surface finish, radiography, passivation and ferroxyl certification.	

D8469-V04/ECN3049

## CUSTOMISED STAINLESS STEEL SYSTEMS, FABRICATIONS AND COMPONENTS

### Axium Process Ltd

Hendy Industrial Estate, Hendy, Swansea, UK SA4 0XP

Tel: +44 (0) 1792 883882

Fax: +44 (0) 1792 886049

Email: [info@axiumprocess.com](mailto:info@axiumprocess.com)

Web: [www.axiumprocess.com](http://www.axiumprocess.com)



FS 83081

All data is provided in good faith and is subject to change