


5284

ASME BPE Clamp reducing tee 316L

| Nom size | | Dim | Dim | Stock number |
|----------|--------|------|------|---------------|
| A | B | L1 | L2 | |
| 3/8" | 1/4" | 57.2 | 25.4 | 5284-6009-006 |
| 1/2" | 1/4" | 60.3 | 25.4 | 5284-6013-006 |
| 1/2" | 3/8" | 60.3 | 25.4 | 5284-6013-009 |
| 3/4" | 1/4" | 63.5 | 25.4 | 5284-6019-006 |
| 3/4" | 3/8" | 63.5 | 25.4 | 5284-6019-009 |
| 3/4" | 1/2" | 63.5 | 25.4 | 5284-6019-013 |
| 1" | 1/4" | 66.7 | 28.6 | 5284-6026-006 |
| 1" | 3/8" | 66.7 | 28.6 | 5284-6026-009 |
| 1" | 1/2" | 66.7 | 28.6 | 5284-6026-013 |
| 1" | 3/4" | 66.7 | 28.6 | 5284-6026-019 |
| 1 1/2" | 1/2" | 73.0 | 34.9 | 5284-6038-013 |
| 1 1/2" | 3/4" | 73.0 | 34.9 | 5284-6038-019 |
| 1 1/2" | 1" | 73.0 | 34.9 | 5284-6038-026 |
| 2" | 1/2" | 85.7 | 41.3 | 5284-6051-013 |
| 2" | 3/4" | 85.7 | 41.3 | 5284-6051-019 |
| 2" | 1" | 85.7 | 41.3 | 5284-6051-026 |
| 2" | 1 1/2" | 85.7 | 41.3 | 5284-6051-038 |

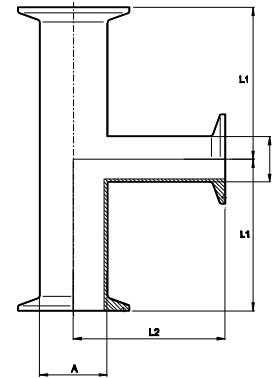

| TECHNICAL DATA | |
|---|---|
| Associated Standards | ASME BPE - 2009 |
| Material | 316L Stainless Steel / LS 1.4435 |
| Material Certification | BS EN 10204/DIN 50049 3.1 for all wetted parts |
| Finish | SF1 (0.5 µm, mechanical) |
| Pressure/Temperature | Up to 10 bar at 20°C |
| Tolerance | To ASME BPE tolerances |
| Options | Sizes up to 6" available We also supply plain ended options which are ASME BPE compliant |
| Clamp Fittings Range | Unions, ferrules, blanks, tees, bends, hoseliners, adaptors, concentric & eccentric reducers, Y pieces |
| Seals | FDA & USP Class VI approved polymers including EPDM, Nitrile, Silicone, Platinum Cured Silicone, Encapsulated & Solid PTFE, Viton® (Viton is a registered trade mark of Dupont Dow Elastomers). |
| Notes | Dimensions are provided in good faith. Seals must be chosen for required operating medium and temperature |
| GENERAL CAPABILITIES | |
| Design and System Fabrication, Hygienic Process Plant, Project Management, In-house Manual and Orbital Welding, Machining, Fabrication and Polishing, Component Customisation | |
| Full materials certification, weld maps, logs, welder qualifications and weld procedures, pickling, passivation and ferroxyl certification. | |

D5284-V01

CUSTOMISED STAINLESS STEEL SYSTEMS, FABRICATIONS AND COMPONENTS

Axium Process Ltd

Hendy Industrial Estate, Hendy, Swansea, UK SA4 0XP

Tel: +44 (0) 1792 883882

Fax: +44 (0) 1792 886049

Email: info@axiumprocess.com

Web: www.axiumprocess.com



FS 83081

All data is provided in good faith and is subject to change